

Report

NPL REPORT MAT 15

**Electrochemical Impedance
Technique to Predict Circuit
Reliability with Lead-free
Solders**

Ling Zou and Chris Hunt

NOT RESTRICTED

MARCH 2008

Electrochemical Impedance Technique to Predict Circuit Reliability with Lead-free solders

L Zou and C Hunt
Industry and Innovation Division

ABSTRACT

The corrosion and electrochemical migration behaviour of metals will have changed with the move to lead-free soldering, and may consequently affect both circuit performance and long-term reliability. In a powered circuit a corrosion induced failure mechanism of particular concern is the formation of metal dendrites, which can lead to catastrophic failure. Dendrite formation is a complex electrochemical process, and metal corrosion is an initial cause. Electrochemical Impedance (EI) of the SnAgCu (SAC) solder and Sn have been measured over a wide range of frequency, and benchmarked against results from the conventional SnPb solder. Two printed circuit board (PCB) finish materials (Cu and electroless nickel on immersion gold (ENIG)) have been also evaluated for comparison. Although the true corrosion rate could not be derived from the EI results directly due to the complexity of the system, the ionic resistance between two electrodes corresponding to metal corrosion can be separated from total impedance measured for conductor-insulator structure of the comb test pattern. The ranking from the lowest to the highest in terms of ionic resistance is ENIG < SnPb < SAC $\approx$ Sn < Cu. The low ionic resistance with SnPb solder compared with SAC and Sn solders suggests that the higher corrosion rate of Pb in the SnPb alloy, and/or high solubility of Pb(OH)₂ are significant factors. In contrast the high ionic resistance for Cu finish board compared with ENIG finish board indicates its low corrosion rate and low solubility of Cu(OH)₂.

The propensities of the five metal systems to form dendrites have also been assessed in terms of a required critical flux concentration, as measured using the traditional Surface Insulation Resistance (SIR) measurement. The dendrite composition formed on different finished boards were analysed using SEM-EDX. The work has shown that the propensity to form dendrites with the five metals correlates with ionic resistance measured in the EI results, conforming that the ionic resistance and hence the metal corrosion rate and the solubility of metal hydroxide play a major role in the dendrite formation. EI measurements have been shown to be a potential non-destructive method to predict electronic circuit reliability.

© Crown copyright 2008
Reproduced with the permission of the Controller of HMSO
and Queen's Printer for Scotland

ISSN 1754-2979

National Physical Laboratory
Hampton Road, Teddington, Middlesex, TW11 0LW

Extracts from this report may be reproduced provided the source is acknowledged and the extract is not taken out of context.

We gratefully acknowledge the financial support of the Department for Innovation, Universities and Skills, (National Measurement System Policy Unit).

Approved on behalf of the Managing Director, NPL,
by Dr M Cain, Team Knowledge Leader,
authorised by Director, Industry and Innovation Division

CONTENTS

1	INTRODUCTION	1
2	EXPERIMENTAL.....	2
2.1	TEST BOARDS	2
2.2	TEST BOARD CLEANING.....	3
2.3	TEST FLUX	4
2.4	TEST BOARD CONTAMINATION	4
2.5	FLUX CONCENTRATION	4
2.5.1	Electrochemical Impedance (EI) measurements.....	4
2.5.2	Surface Insulation Resistance (SIR) measurement.....	4
2.6	ELECTROCHEMICAL IMPEDANCE (EI) MEASUREMENT	4
2.7	SURFACE INSULATION RESISTANCE (SIR) MEASUREMENT	5
2.8	EDX ANALYSIS OF DENDRITES	5
3	RESULTS	5
3.1	ELECTROCHEMICAL IMPEDANCE SPECTRA ON FIVE BOARD FINISHES	5
3.2	SURFACE INSULATION RESISTANCE RESULTS	9
3.4	SEM-EDX ANALYSIS OF DENDRITES ON SIR BOARDS.....	12
4	DISCUSSION.....	16
4.1	IONIC RESISTANCE FOR DIFFERENT BOARD FINISHES	16
4.2	EFFECT OF IONIC RESISTANCE ON DENDRITE FORMATION	16
4.3	EI MEASUREMENT TO PREDICT DENDRITE FORMATION	17
5	CONCLUSIONS.....	17
6	ACKNOWLEDGEMENTS	18
7	REFERENCES.....	18

1 INTRODUCTION

Achieving high reliability is a key issue in today's electronics assemblies, with a loss of continuity, or short circuits failures, caused by metal corrosion an important failure mode. The corrosion is often associated with contaminants originated from the manufacturing process, flux residues that may contain ionic or hydrophilic materials. Contamination of electronic assemblies may also occur when operating in harsh environments where other aggressive species maybe encountered. Contaminants when combined with moisture result in a lowering of Surface Insulation Resistance (SIR)^{1,2} between conductors on the circuit, and can directly accelerate corrosion. On a circuit assembly corrosion may take place with and without the assistance of an applied voltage. Without the voltage bias, corrosion is driven by the electrochemical force, which depends thermodynamically on the anodic and cathodic processes. In general the metals used for electronic circuit have a high corrosion resistance, without bias corrosion should not be a big concern. With applied bias the voltage can overcome the electrochemical thermodynamic and kinetic barrier for corrosion reactions to take place. In addition, the electric field on an insulating surface can provide a driving force for metal ion migration, and result in dendrite formation^{3, 4}. Catastrophic failure occurs when dendrite growth between oppositely charged metal conductors bridge the conductor gap and cause short circuits, and is a very important failure mechanism in electronic assemblies.

A fundamental study of the electrochemical process in the dendrite formation is difficult, since the adsorbed atmospheric moisture layer is only approximately 100nm thick. Typically electrochemical studies use electrode systems that are on a significantly greater dimensional scale than 100nm. Dendrite formation is a three-step process. Firstly, metal is oxidized to metal ions into electrolyte, then metal ions migrate from the anode to cathode under an electric field, and finally metal ions are reduced to metal and deposited at the cathode. Clearly all these processes are necessary for dendrite formation, and there are many factors that can influence these processes. *Metal oxidation at the anode*: each metal will have a different corrosion rate⁵, and a metal with a fast corrosion rate will clearly form higher metal ion concentrations in the thin water film, hence enhancing the formation of dendrites. *Metal ion transportation*: if the metal ion forms an insoluble compound, it will not migrate from the anode to cathode, and therefore solubility of the metal hydroxide is key to dendrite formation⁶. Finally, *metal deposition* at the cathode, Zamanzadeh⁷ found that there is limiting over-potential for dendrite formation, below which dendrite formation can never occur. Most investigations have avoided such difficulties by using statistical evaluation of failures from SIR measurement, without addressing the electrochemical nature of potential failure processes. Other researches on electrochemical corrosion of electronic metals are usually carried out in bulk solution without consideration of high ionic resistance between conductor lines on electronic circuits⁸⁻¹¹.

The conductor-insulator structure of a comb pattern with an adsorbed moisture layer is shown schematically in Figure 1, and when an AC signal is applied an equivalent circuit representing each significant conduction process is also shown^{12, 13}. R_c is the ionic resistance of the thin water layer with contaminants across the inter-electrode gap of the comb, and C_c is the capacitance of the comb pattern. The circuit elements in the dotted box R_p are a representation of electrochemical

processes at the interface of the contaminant layer and electrode. These reactions represent the transition from electronic conduction in the electrode to ionic conduction in the contaminant layer. The equivalent circuit for these electrochemical processes includes the charge-transfer resistance R_{CT} , associated with a faradic reaction at the electrode surface; C_{DL} a double layer or blocking capacitance at the interface, which may allow ionic current to flow in the absence of a faradic reaction, and Z_W the Warburg impedance, detectable when a faradic reaction occurs under diffusion control near the interface. The different conduction processes can be separated by electrochemical impedance (EI) measurements due to the different frequency dependences. EI results can separate ionic resistance R_C from overall impedance of the whole system (R_T). This can provide the information on where the controlling step in the overall conduction process lies. In this conduction system R_C is an important parameter, dominating metal corrosion and dendrite formation. In contrast, the SIR measurement can only measure the total resistance of the system.

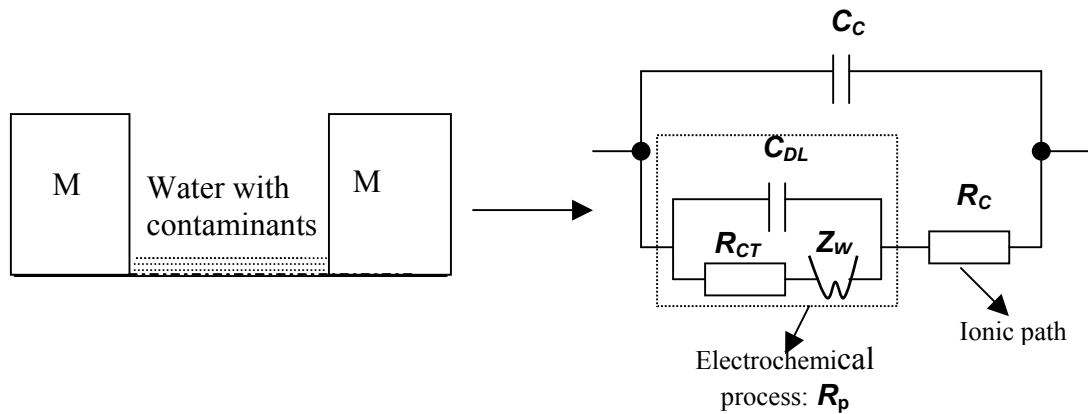


Figure 1. Conduction path for conductor-insulator structure

The aim of this work was to investigate the corrosion of three solders and two PCB finish materials using EI. The two electrode system of a comb test pattern, manufactured from the studied materials was used and tested at an elevated temperature and humidity. The inter-electrode gap of 200 μ m of the comb patterns reflected current high-density electronic circuit design. Dendrite formation was also assessed using SIR measurements, and these measurements were correlated with the ionic resistance R_C . The applicability of using simple and quick non-destructive EI measurements to predict reliability was evaluated.

2 EXPERIMENTAL

2.1 TEST BOARDS

A test board was designed consisting of four identical comb patterns, as shown in Figure 2. The size of each comb pattern was 25 x 25mm with 0.60mm pitch and 0.20mm gap. Boards were prepared with five finish materials: SAC, Sn, SnPb, ENIG and copper. Sn, ENIG and Cu finished boards were obtained from the PCB supplier directly. SAC and SnPb finish boards were manufactured from Sn boards

printed with proprietary no-clean solder pastes. The pastes used were Sn63Pb37 for the SnPb-finished boards, and Sn96.5Ag3.0Cu0.5 for the SAC-finished boards. Sn finish boards were used here to manufacture SAC and SnPb finish boards, the effect of underlying metal on the studied metal finish were therefore minimised, as solder may not completely wet the track surface particularly for SAC alloy. The wetting problem with the lead-free soldering process was found in a previous study¹⁴.

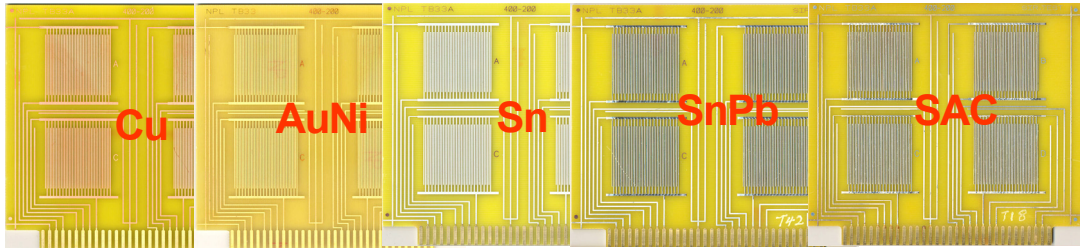


Figure 2. Test board with five finishes

2.2 TEST BOARD CLEANING

The aim of this work was to investigate the corrosion behaviour, and propensity of solder alloys and PCB finish materials to form dendrites. In order to eliminate any effects of contamination associated with the manufacture processes, the cleanliness of test boards with different finishes had not only to be assured but also to achieve similar high levels of SIR. The SAC and SnPb boards were prepared by printing onto the Sn finished as received boards with solder paste and reflowed before the following cleaning procedure. In order to achieve the similar level of SIR, different cleaning procedures are applied to different boards. Three cleaning procedures were:

For the ENIG - and copper-finished boards:

- Ionograph cleaning in 75% IPA + 25% DI water mixture at 45°C for 15 minutes

For Sn finished board :

- A single pass through a reflow process with a maximum temperature of 250°C
- Ionograph cleaning in 75% IPA + 25% DI water mixture at 45°C for 15 minutes

For SAC- and SnPb-finished boards:

- Ultrasonic cleaning in 100% Zestron FA+ at 50°C for 5 minutes
- DI water rinsing at 50°C for 5 min
- Ionograph cleaning in 75% IPA + 25% DI water mixture at 45°C for 15 minutes

2.3 TEST FLUX

A commercial flux was used for the study. The flux was recommended by a flux supplier, and was a no-clean flux suitable for lead-free soldering. The flux was a low resin content, halide-free and solvent-based.

2.4 TEST BOARD CONTAMINATION

The cleaned boards were fluxed using 50 μ l of the test flux to cover each comb pattern. Fluxed boards were dried in a 100°C dry oven for 5 minutes for testing.

2.5 FLUX CONCENTRATION

2.5.1 Electrochemical Impedance (EI) measurements

For EI measurements the flux was diluted to a certain level to achieve pronounced effects in the EI results from the electrochemical process. A dilution of 25% flux in IPA was used for all board finishes defined from the preliminary testing.

2.5.2 Surface Insulation Resistance (SIR) measurement

For this work it was necessary to determine the minimum flux concentrations that caused dendrite formation on the five board finishes. While this appears to be an artificial manipulation of the flux residue level, it does allow characterisation of the flux residues in the critical regime for each board finish, and is relevant since process residues vary over a wide range. Therefore the flux concentrations were reduced as necessary from the as-received flux concentration by dilution with IPA. Three different concentrations (low, middle and high) were found for the different metal finishes from preliminary testing, and these are listed in Table 1.

Table 1. Test flux concentration for different board finish

Board finish	ENIG	Cu	SnPb	Sn	SAC
Flux concentration (% in IPA)	5	50	15	15	15
	10	65	20	25	25
	15	80	25	35	35

2.6 ELECTROCHEMICAL IMPEDANCE (EI) MEASUREMENT

The EI was measured for each board finish using an ACM instruments GillAC. A two electrodes system was used for the test, as shown in Figure 3. EI measurements were performed on three test patterns for ENIG board finish to check the repeatability of the test, and only one test pattern for the rest board finishes. As soon as the chamber reached the desired temperature and humidity, 40°C/93%RH, the open circuit potential (corrosion potential) was monitored for 60 minutes, then

sample impedance were measured with the application of a 50mV peak-peak AC single with frequencies ranging from 3000 to 0.01 Hz.

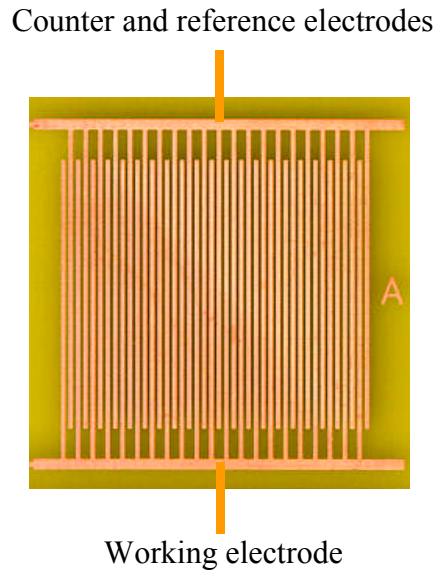


Figure 3. Two-electrode system for EI measurements

2.7 SUFACE INSULATION RESISTANCE (SIR) MEASUREMENT

A single board, four test patterns, for each board finish was SIR tested. The SIR measurements were performed under the same condition as the EI measurements, 40°C/93%RH. A bias voltage of 5V DC was applied during the test period of 72 hours, and the SIR was measured every 15 minutes. The test equipment had a $10^6\Omega$ resistor incorporated into each test channel to preserve dendrite formation, so the minimum SIR measurement value of each channel was $10^6\Omega$.

2.8 EDX ANALYSIS OF DENDRITES

The dendrites formed during the SIR measurement on different board finish were identified and located using a optical microscope with back lighting and the dendrite composition was assessed using an energy-dispersive X-ray (EDX) analyser attached to a SEM.

3 RESULTS

3.1 ELECTROCHEMICAL IMPEDANCE SPECTRA ON FIVE BOARD FINISHES

EI results, Bode, Nyquist and phase angle plots, for five board finishes are plotted in Figures 4 - 8. The results of three repeat tests (a, B and C) for ENIG finish, as shown in Figure 4, showed a reasonable good repeatability, hence only one test was conducted for the rest board finishes.

The EI results for the different board finishes revealed a range of responses. For Sn, SAC and Cu board finishes a single arc was observed in the Nyquist plot, demonstrating that the comb behaved as a simple parallel combination of R_c and C_c ¹². The components corresponding to electrochemical process were not pronounced in the results. Therefore the R_c can be easily estimated as the diameter of the arc. In contrast, the electrochemical processes were apparent in the Nyquist plot for ENIG and SnPb boards, as shown in Figures 4 and 5. The first arc in the Nyquist plot was due to a parallel combination of R_c and C_c , and the following behaviour in the plots represented mixed electrode reactions and diffusion processes, and correspond to the impedance components R_{ct} , C_{dl} and Z_w . A commonly observed second arc was not always seen in the plots due to a high R_c , which also can be distorted due to the complication of the above processes. Therefore these components are not always easy to interpret from the results. However R_c always can be evaluated as the diameter of the first arc.

Another important parameter can be derived from the results is total impedance at low frequency (at 0.01Hz). At the low frequency the impedance measured from Bode plot is the overall resistance for all conduction processes. The impedance from capacitive components become negligible, this is evidenced by the phase angle. The phase angle tends to 0° for all board finishes at 0.01 Hz.

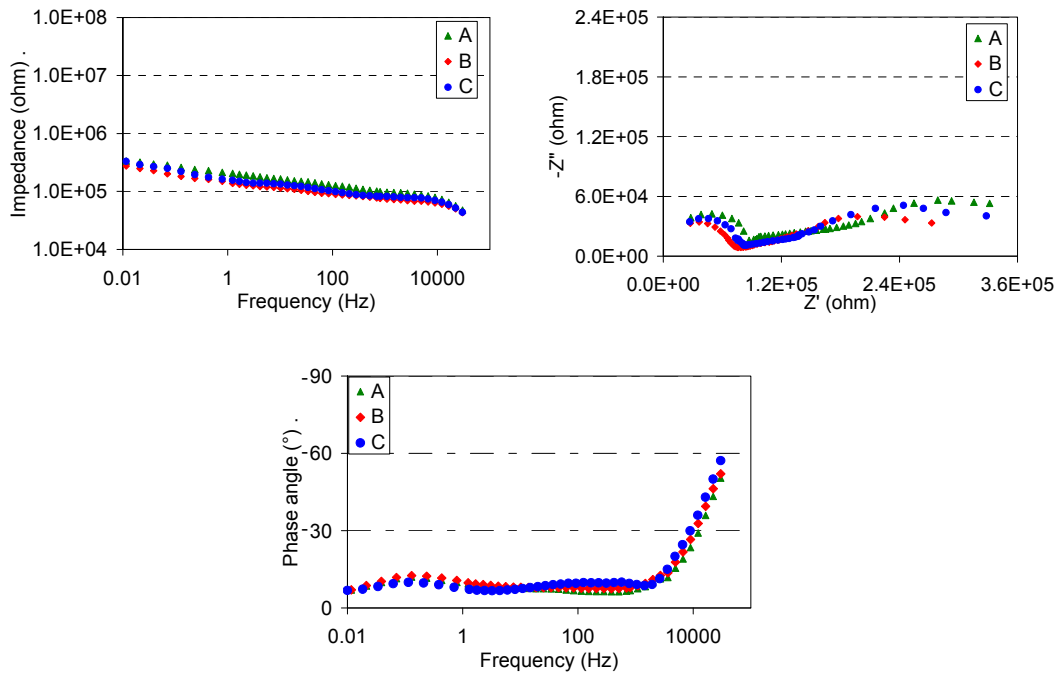


Figure 4. Impedance results for ENIG board

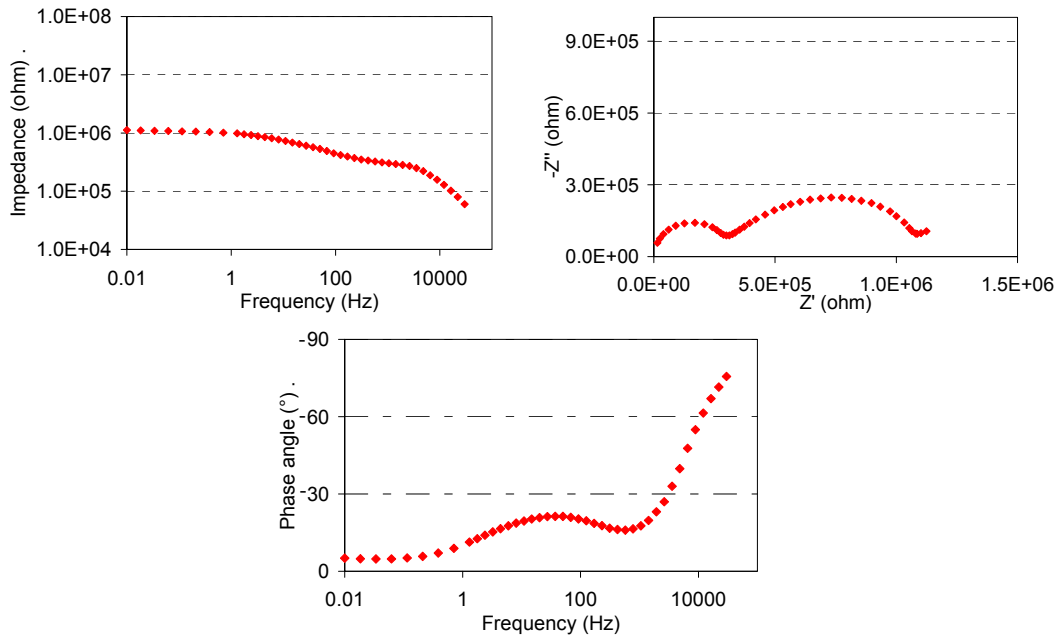


Figure 5. Impedance results for SnPb board

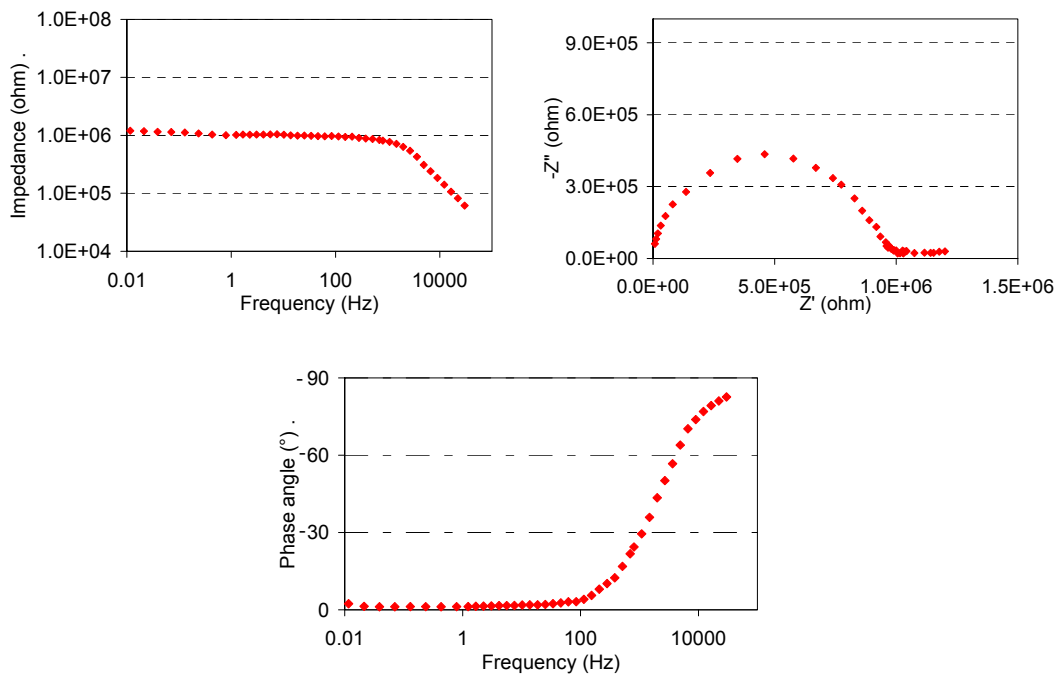


Figure 6. Impedance results for SAC board

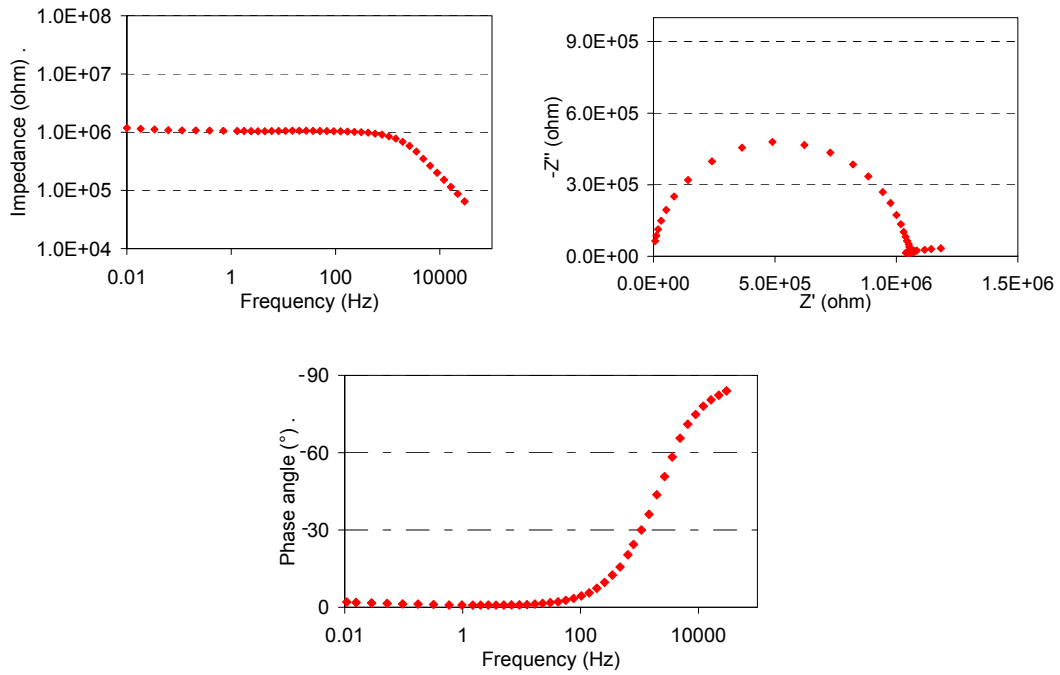


Figure 7. Impedance results for Sn board

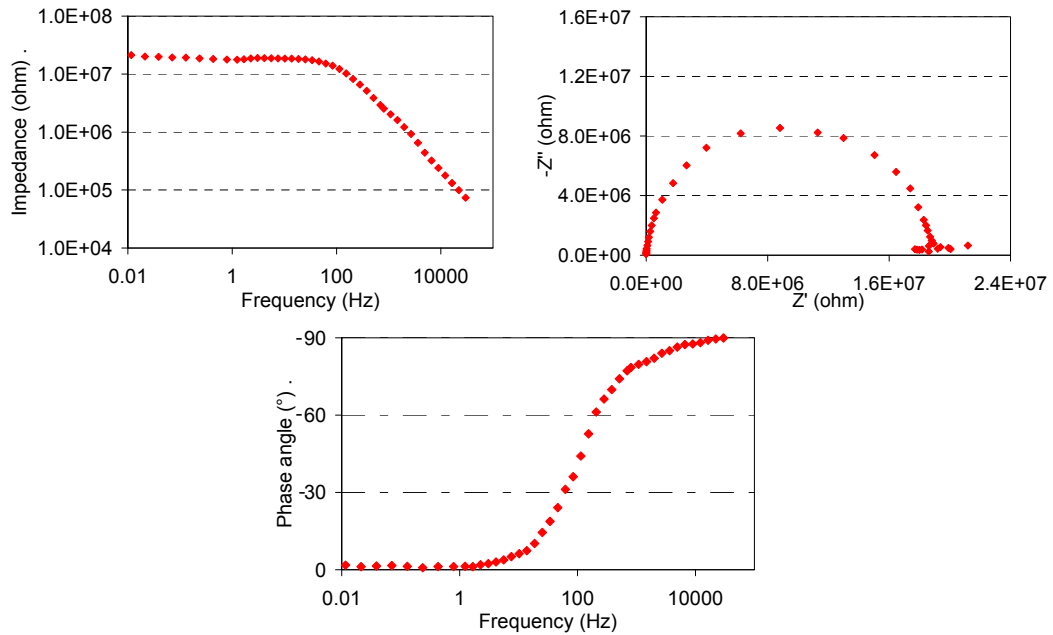


Figure 8. Impedance results for Cu board

The ionic resistances R_c evaluated from Nyquist plots, and the total impedance at 0.01Hz ($R_{T(0.01)}$) from Bode plots for the five studied metals are listed in Table 2, and plotted in Figure 9. These results show that the ionic resistance R_c dominates the overall impedance $R_{T(0.01)}$, as seen for Sn, SAC and Cu board finishes. At low ionic resistance the impedance due to corrosion processes R_p become significant, as seen

for SnPb and ENIG board finishes. Therefore the lower ionic resistance of the system, the more pronounced the corrosion processes. The ranking from the highest to the lowest in terms of the ionic resistance is $\text{Cu} > \text{Sn} \approx \text{SAC} > \text{SnPb} > \text{ENIG}$.

Table 2. $R_{p \text{ total}}$ and R_c for five board finishes

Metal	Cu	Sn	SAC	SnPb	ENIG
$R_{T(0.01)} (\text{M}\Omega)$	21.22	1.28	1.20	1.12	0.27
$R_c (\text{M}\Omega)$	20.11	0.98	0.92	0.34	0.07

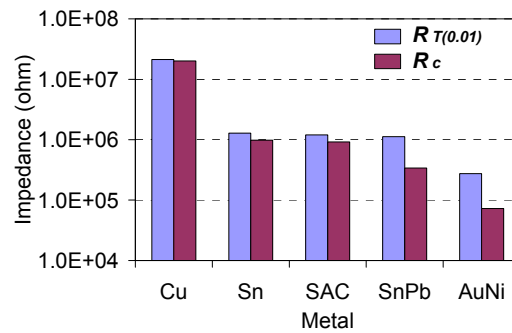


Figure 9. $R_{T(0.01)}$ and R_c for five board finishes

3.2 SURFACE INSULATION RESISTANCE RESULTS

The SIR values from four test patterns contaminated at three concentrations of flux for ENIG-finished boards are presented in Figure 10, and those for SnPb, SAC, Sn and Cu-finished boards in Figures 11, 12, 13 and 14 respectively.

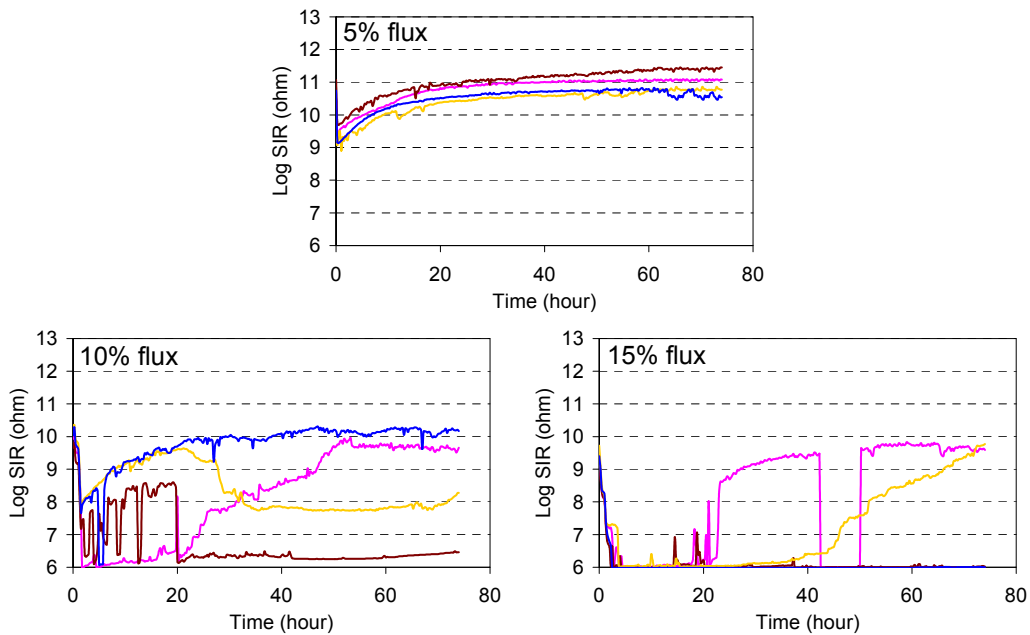


Figure 10. SIR results from ENIG boards with three concentrations of flux

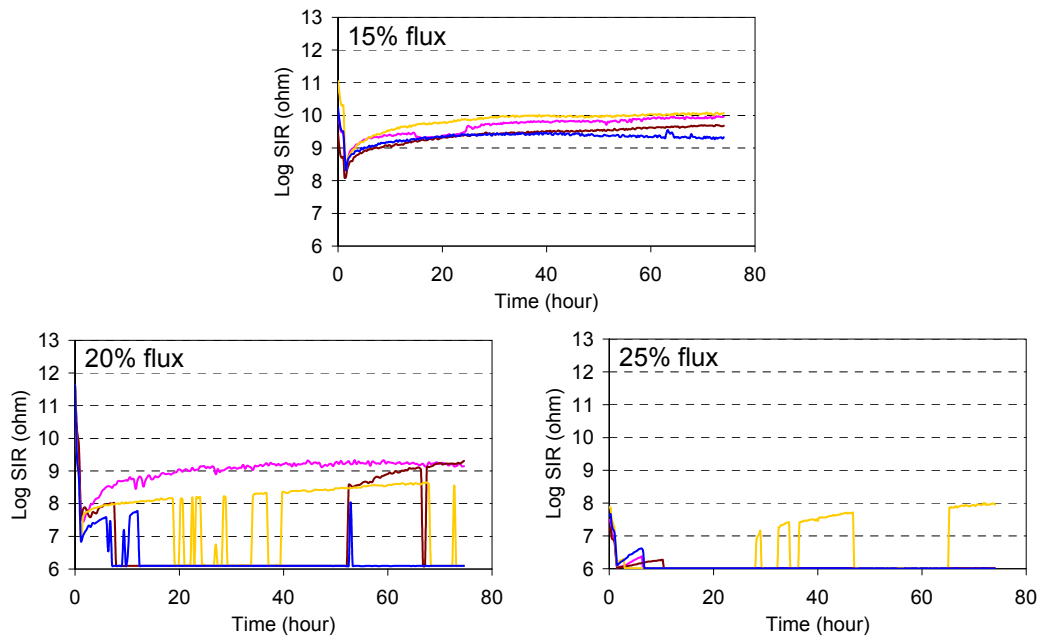


Figure 11. SIR results from SnPb boards with three concentrations of flux

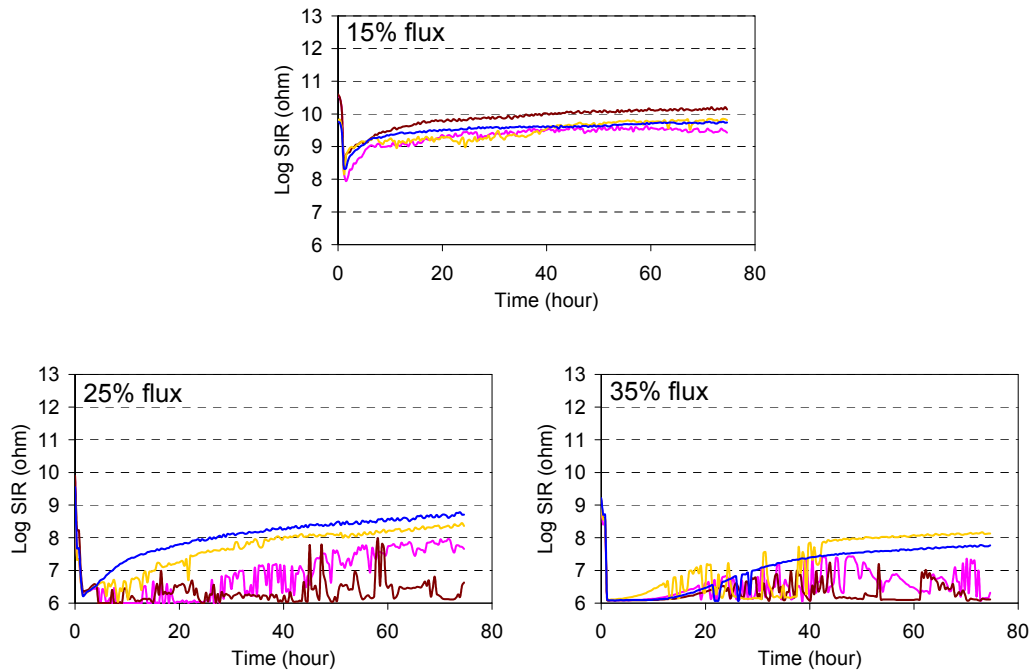


Figure 12. SIR results from SAC boards with three concentrations of flux

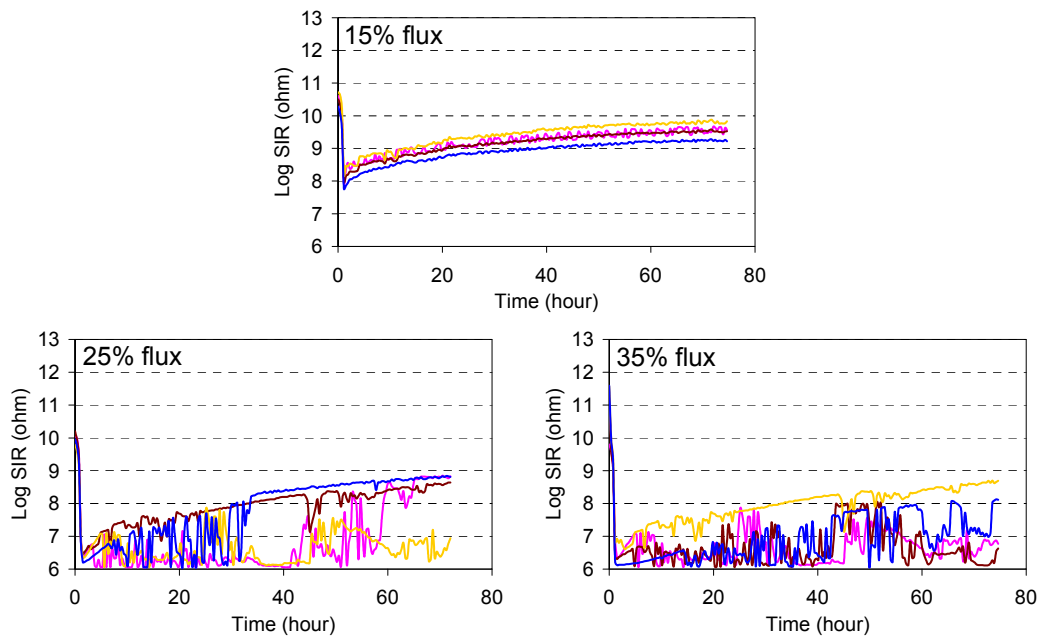


Figure 13. SIR results from Sn boards with three concentrations of flux

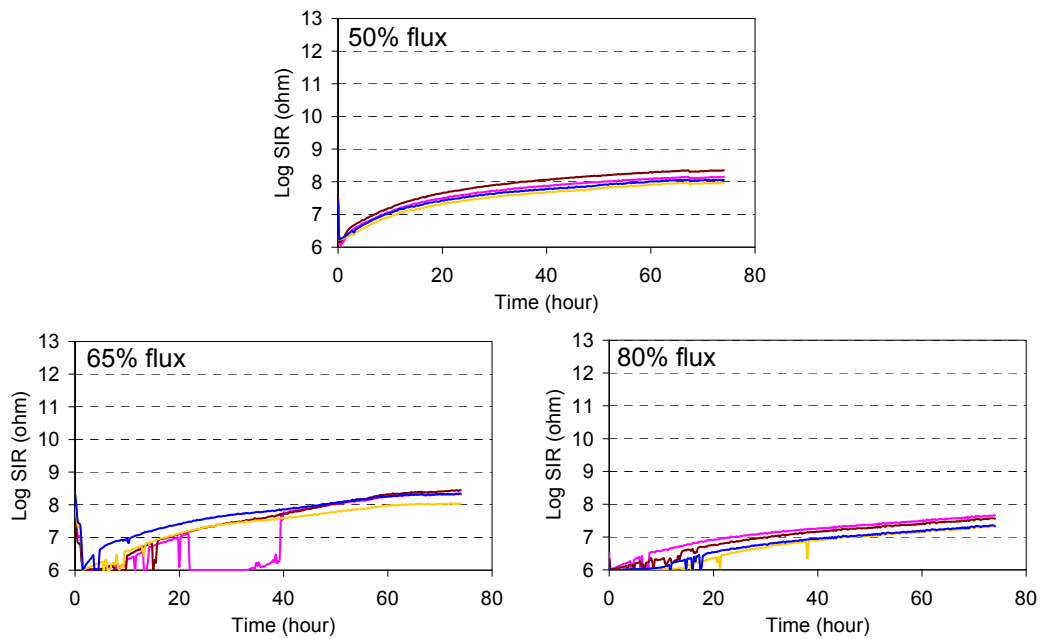


Figure 14. SIR results from Cu boards with three concentrations of flux

Some important findings should be noted from these results. For all board finishes at low flux concentrations, the SIR values slowly increased with time, and stabilised within the test period. This increasing SIR was typical of the situation in which the ionic contaminants were depleted from the insulating surface due to mobile ions migrating toward the electrodes and then undergoing reduction and oxidation processes at both electrodes, and therefore no longer contributing to the conduction process. In the case of the intermediate flux concentration levels, occasional rapid

changes in SIR values were noted, resulting from dendrite formation. Hence, this flux level was defined as the minimum flux concentration to promote dendrite (FCPD) growth. When the flux concentration was increased still further, dendrite formation was more prevalent, as shown by the third plot in each figure.

The FCPD are listed in Table 3 and plotted in Figure 15, and the ranking for the resistance to dendrite formation is $\text{Cu} > \text{Sn} \approx \text{SAC} > \text{SnPb} > \text{ENIG}$, similar to that of the ionic resistance R_c described earlier.

Table 3. The FCPD on different finish boards

Board finish	FCPD (% in IPA)
ENIG	10
SnPb	20
SAC	25
Sn	25
Cu	65

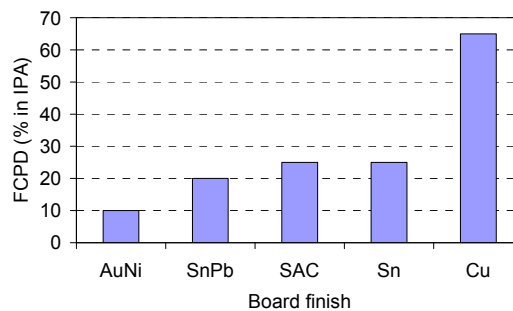


Figure 15. The FCPD on different board finishes

3.4 SEM-EDX ANALYSIS OF DENDRITES ON SIR BOARDS

The dendrites formed on different board finish during the SIR measurements were photographed using an optical microscope, as shown in Figure 16, and analysed using SEM-EDX equipment. The results, normalised in weight percent, are listed in Tables 4-8. They revealed that for the ENIG-finished boards the composition of the dendrites was mainly nickel, consistent (from an electrochemical point of view) with preferential dissolution of the nickel, compared with the noble metal gold.

On the copper-finished boards the dendrites' composition was, as expected, 100% copper. However, for the SnPb board finish the high Pb content in dendrites suggests that Pb is easier to corrode to form dendrite than Sn in SnPb alloy. On SAC board finish the dendrites reflected the alloy composition and were mainly Sn, for some dendrites there was higher Ag and Cu. These results do not suggest a particular sensitivity to Ag, further work is need here to substantiate earlier work at NPL¹⁴ that Ag migration is an issue when Ni is present. A contributory factor suggested by Yu¹⁵ is the formation of inter-metallic compounds in the solder alloy that prevent Ag migration. For Sn finish were 100% Sn.

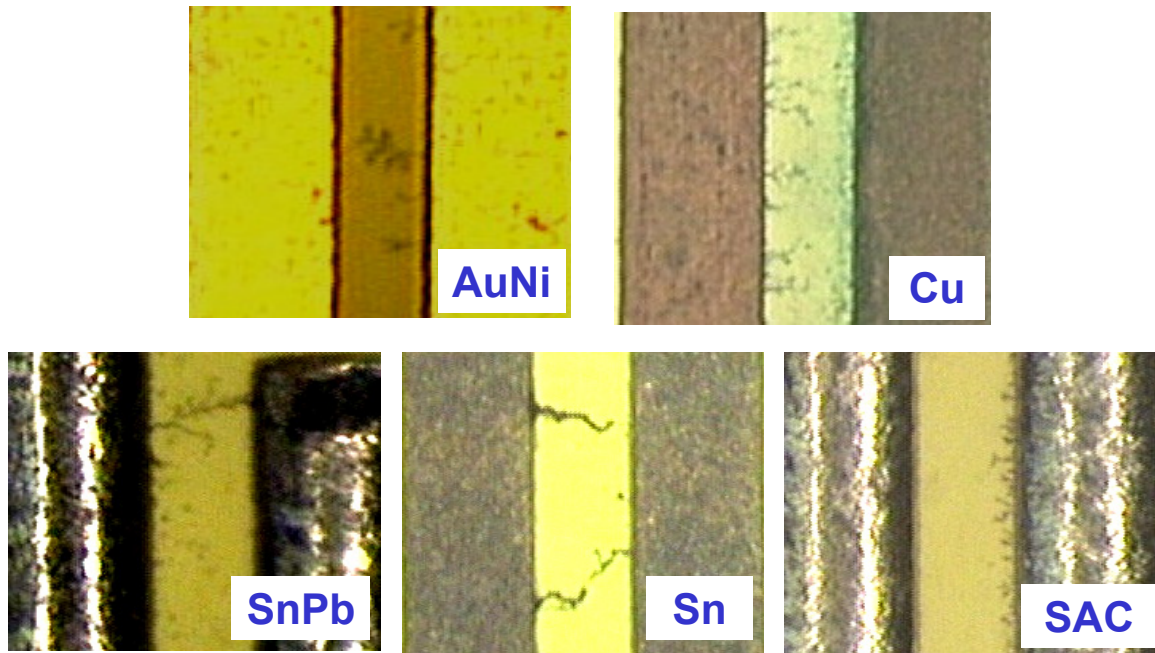


Figure 16. Dendrites formed on different board finish

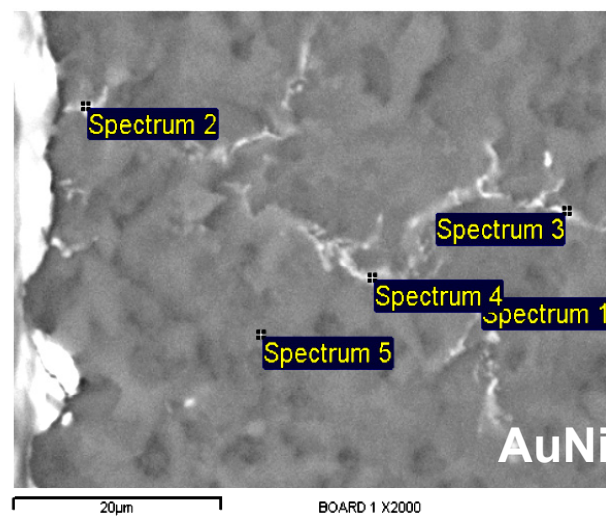


Table 4: Dendrite formed on a ENIG-finished board

Spectrum	Ni	Au
1	100.0	
2	92.8	7.1
3	100.0	
4	100.0	
5	100.0	

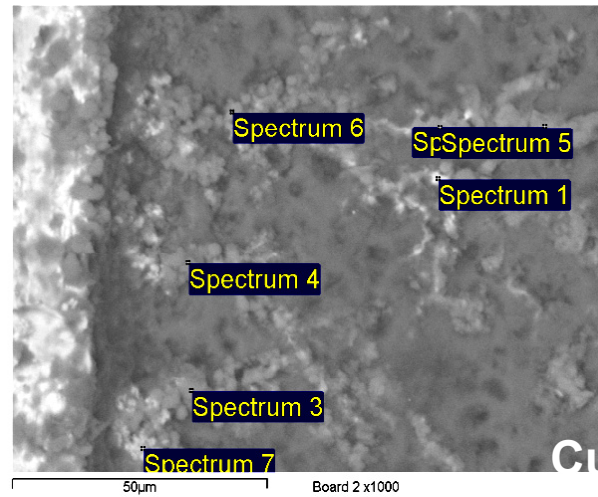


Table 5: Dendrite formed on a copper-finished board

Spectrum	Cu
1	100.0
2	100.0
3	100.0
4	100.0
5	100.0
6	100.0

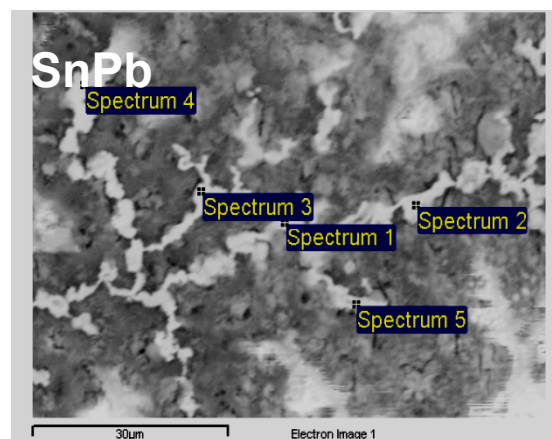
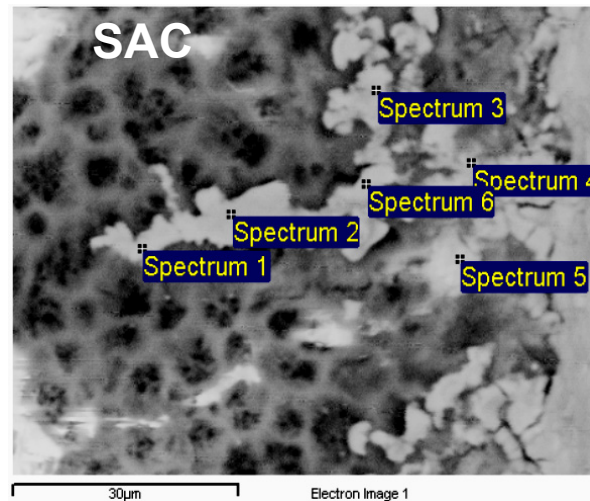
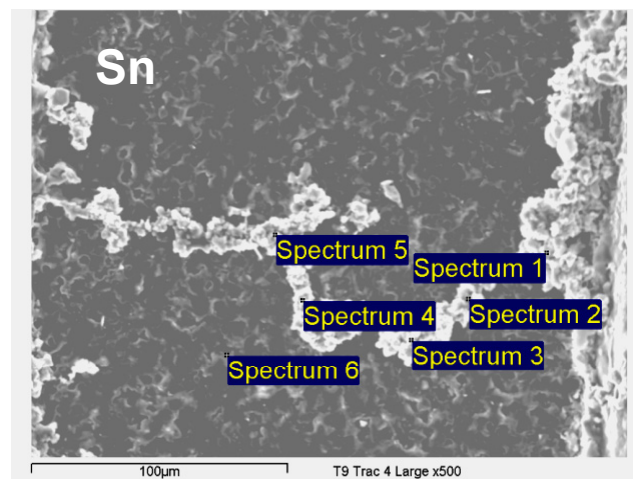


Table 6: Dendrite formed on a SnPb-finished board

Spectrum	Sn	Pb
1	17.1	82.9
2	56.2	43.8
3	26.2	73.8
4	16.3	83.7
5	32.3	67.7

**Table 7:** Dendrite formed on a SAC-finished board

Spectrum	Cu	Ag	Sn
1	0.5	3.7	95.8
2		7.9	92.1
3	5.6		93.4
4	0.9	2.3	96.8
5		4.5	95.5
6	2.5	3.1	94.4

**Table 8:** Dendrite formed on a Sn-finished board

Spectrum	Sn
1	100
2	100
3	100
4	100
5	100
6	100

4 DISCUSSION

4.1 IONIC RESISTANCE FOR DIFFERENT BOARD FINISHES

An aim of EI measurements is to evaluate the metal corrosion rate at the anode, but for our test system the impedance attributed to corrosion process R_p is not easy to interpret, due to the high ionic resistance between the two electrodes. The different finished boards were similarly contaminated, if metal corrosion was not significant the ionic resistance between two electrodes will be the most significant part of the overall impedance. Therefore, under these circumstances the R_c should be the same for different board finishes. The difference on ionic resistance R_c on different board finishes must be due to the metal corrosion. Metal corrosion can affect R_c in two ways: Firstly, if the metal has high corrosion rate, more metal ions can be produced from anode into the electrolyte lowering ionic resistance R_c of the system. Secondly, if the corrosion products (metal hydroxide) have high solubility, corroded metal ions will stay in electrolyte, and contribute to conduction process lowering R_c . Therefore, although R_c is not a direct measure of metal corrosion rate, it is a function of the metal corrosion rate and metal hydroxide solubility.

4.2 EFFECT OF IONIC RESISTANCE ON DENDRITE FORMATION

As discussed in the previous section ionic resistance reflects a combination of the metal corrosion rate and solubility of the metal hydroxide. In this section the effect of the metal corrosion rate and solubility of the metal hydroxide on dendrite formation is discussed with the three steps involved for dendrite formation.

Dendrite formation can be considered as three-step process as mentioned in the introduction, the most important step is metal ion dissolution at the anode, and a higher corrosion rate will produce more metal ions to migrate from the anode to form dendrites. The metal ion produced at the anode must be able to migrate to the cathode without being precipitated as insoluble compounds, hence the solubility of metal hydroxide will also affect the metal migration.

With SIR testing when 5V DC is applied to the test comb, thermodynamically metal dissolution at the anode will dominate the anodic reactions. At the cathode, hydrogen and oxygen reduction will be preferable reactions, as there is sufficient H^+ from flux residues and O_2 in the thin water film. Metal ion deposition may not occur unless the over-potential is sufficiently high since the metal ion concentration may be low due to limited dissolution at the anode and low solubility of the metal hydroxides. Previous work also found that a minimum cathodic over-potential was required for the appearance and propagation of dendrite⁷. The voltage value, 5V, between the anode and cathode would normally be considered to be high for an electrochemical process in solution. However, the electrolyte on the comb is a thin water film and hence there is a significant voltage drop across the inter-electrode gap R_c . Therefore, the activation over-potential at the electrodes is very small and, depends on the R_c value. If system has low R_c , then more voltage is dropped at the electrodes and a higher over-potential is achieved. With a higher over-potential at the cathode, there is an increased the ability for metal ion deposition.

Furthermore, a high over-potential at the anode accelerates metal dissolution, and in turn more metal ions will be produced in the electrolyte. Thus, a system with low R_c , both the metal ion concentration and the cathodic over-potential will be high, and help to promote metal ion deposition at the cathode. Therefore ionic resistance R_c is a very important indicator on dendrite formation for the system.

4.3 EI MEASUREMENT TO PREDICT DENDRITE FORMATION

The ranking on propensity to form dendrite for five studied metals from SIR measurements demonstrates an inverse correlation with ionic resistance (R_c) interpreted from the EI results. Therefore, R_c can be used to predict the propensity of the studied metals to form dendrite. The EI measurements use a small amplitude AC single, and the technique itself does not actually promote dendrites. Hence, this predictive capability could be developed into a non-destructive fast test method.

The higher propensity to form dendrite on SnPb finished board compared with SAC and Sn finished board is due to its low ionic resistance, which was probably caused by high corrosion rate of Pb in SnPb solder alloy, or, and high solubility of $Pb(OH)_2$. This was supported by the EDX analysis of the dendrites showing high Pb content. Low propensity of lead-free solders implies that the reliability of the circuit will be improved using lead-free solders over a SnPb solder. This will not always be necessarily true, because high temperature soldering process and different metallurgy require more active fluxes for lead-free solder, hence there is the potential of leaving more flux residues on the circuit. The dendrite formation strongly depends on the level of flux residues, as the SIR results in 3.3, and discussed in previous report¹⁴. The propensities to form dendrites in lead-free solders, SAC and Sn, are likely to be similar and dominated by the corrosion of Sn, the main constituent in these alloys.

Comparing two PCB finishes of Cu and ENIG, the low propensity to form dendrite for the Cu finish, compared to the ENIG finish, can be attributed to the low corrosion rate and solubility of $Cu(OH)_2$. The low solubility of $Cu(OH)_2$ was evidenced by some green corrosion products observed around the anode in Figure 16.

5 CONCLUSIONS

Electrochemical Impedance measurements have been made of three solders and two PCB finish materials. Effect of metal corrosion on reliability of circuit (dendrite formation) has been investigated using SIR measurement. In developing the impedance technique results were compared with those taken with SIR. The corrosion conditions were manipulated so that dendrite formation occurred, and the dendrite composition was confirmed with EDX. The dominant conduction process for dendrite formation has been identified.

EI results were recorded over a wide range frequency on comb test pattern, as typically used in the SIR technique. This allowed the ionic resistance R_c between two electrodes to be separated from the overall impedance of the system $R_{T(0.01)}$. R_c was found to be dependent on the metal corrosion rate and solubility of the metal

hydroxide. The ranking from the highest to the lowest in terms of the ionic resistance is $\text{Cu} > \text{Sn} \approx \text{SAC} > \text{SnPb} > \text{ENIG}$.

The relative propensity for dendrite formation assessed using SIR measurement demonstrates an inverse correlation with ionic resistance, R_c , interpreted from the EI results. In a system with low R_c a significant amount of metal ion migration occurs, resulting in dendrite formation and probable short circuit. Hence, from these results the R_c value could be interpreted in the relative likelihood for dendrites to form, and so the reliability of electronic assemblies. Since the EI technique only applies a 50mV AC signal, and a scan takes less than one hour, the R_c measurement can be considered to be a fast and method non-destructive.

Dendrite formation is a complex electrochemical processes, dependent on both the metal corrosion rate and the solubility of metal hydroxide. The high propensity to form dendrite of a SnPb solder compared with a SAC solder and Sn is due to high corrosion rate of Pb in SnPb solder alloy, and/or high solubility of $\text{Pb}(\text{OH})_2$. Therefore under the same contamination conditions an electronic circuit will be more reliable if soldered with lead-free solders. Furthermore a Cu finished PCB will be less likely to form dendrites compared to the ENIG finish due to its low corrosion rate and low solubility of $\text{Cu}(\text{OH})_2$.

6 ACKNOWLEDGEMENTS

The work was carried out as part of a project, Measure Electrochemical Corrosion of Lead-Free Process Residues in Electronic Assemblies, in the Processing Programme of the UK National Measurement System Programmes Unit of the Department for Innovation, Universities and Skills (DIUS).

7 REFERENCES

1. Chan, H. A. (1996) "Surface insulation resistance methodology for today's manufacturing technology" IEEE Transactions on Components, Packaging, and manufacturing Technology, Part C, Vol.19, NO.4 October, pp300-307
2. Hunt, C. and Zou, C. L. (1999), "The impact of temperature and humidity condition on surface insulation resistance values for various fluxes", Soldering and Surface Mount Technology, Vol.11 No 1, pp. 21-24
3. Zou, C. L. and Hunt, C. (1999) "The effect of test voltage, test pattern and board finish on surface insulation resistance (SIR) measurements for various fluxes" NPL report CMMT(A)222
4. Harsanyi, G (1995) " Electrochemical process resulting in migrated short failures in microcircuit" IEEE Transactions on Components Packaging and Manufacturing Technology Part A 18 (3) September pp 602-610
5. Zou, C. L. and Hunt C. (2006) "Electrochemical behaviour of solder alloy" NPL Report DEPC-MPR (PAPER) 040 September
6. Steppan, J. J. Roth, J.A, Hall, L. C. Jeanotte, D. A and Carbone, S. P. (1987) "A review of corrosion failure mechanisms during accelerated test", J. Electrochemical Soc., Vol.134 pp. 175-190
7. Zamanzadeh, M. (1990) "Electrochemical examination of dendrite growth on electronic devices in HCl electrolytes" Corrosion, Vol. 46, No. 8 August pp 665-671

8. Yang, S. (2007) "Failure model for silver electrochemical migration" IEEE Transactions on device and materials reliability 7 (1) March pp 188-196
9. Brusic, V., Dimilia, D. D. and Macinnes, R. (1991) "Corrosion of lead, tin, and their alloys" Corrosion vol. 47, No.7 July pp509-518
10. Mohanty, U.S, Lin, K.L. (2007) "Electrochemical corrosion study on Sn-XAg-0.5Cu alloys in 3.5% NaCl solution" Journal of Materials Research 22 (9) September pp2573-2581
11. Beccaria A.M., Mor, E.D., Bruno, G and Poggi, G (1982) "Corrosion of lead in sea water" Br Corros.J., Vol.17, No.2 pp87-91
12. Zou, C. L. and Hunt C. (2007) "Characterisation of the Conduction Mechanisms in Adsorbed Electrolyte Layers on Printed Circuit Boards" paper submitted to Applied Electrochemistry
13. Takahashi, K, M (1991) "Conduction paths and mechanisms in FR-4 epoxy/glass composite printed wiring boards" J. Electrochem. Soc., Vol.138, No.6 June pp 1587-1593
14. Zou, C. L. and Hunt C. (2007) "Susceptibility of lead-free system to electrochemical migration" NPL Report MAT1
15. Yu, D.Q. (2006) Electrochemical migration of SnPb and Lead free solder alloys under distilled water. J Mater Sci: Mater Electron 17: 219-227 DOI 10.1007/s 10854-006-6764-0